

Color From Within

The Fiilex P200 FlexJet reshapes what is possible in LED lighting. This powerful LED light has 8 different color settings, 3000K, 4300K, 5600K, Magenta, Yellow, Aqua, Cyan, and Blue. With the P200 and the Color Blender accessory you can project colorful light wherever you desire. With the Fiber Optic accessory you have the power to bend and shape light anyway you want. This is a creative tool that goes where you go and is limited only by your imagination.



FEATURES

- 200W Equivalent Output - 60W Draw
- Color Temperature Range (8 Color Settings: 3000K, 4300K, 5600K, Magenta, Yellow, Aqua, Cyan, Blue)
- High CRI >92
- Full Spectrum Light Quality - No Spikes
- Dimming (100%-10%)
- Flicker Free at any Frame Rate
- Patented Dense Matrix LED Technology
- Solid State Technology - No Bulbs to Replace
- Compatible with Broadcast Batteries
- Cool to the Touch Housing
- Lightweight, Compact, Easy for Travel



P200 SPECTRUM DATA

Unique in the Fiilex line-up, the P200 Flex Jet has the ability to produce vibrant high quality color. There is no spiking from the full spectrum light, so your colors will look just as amazing to the camera as they do to the eye.

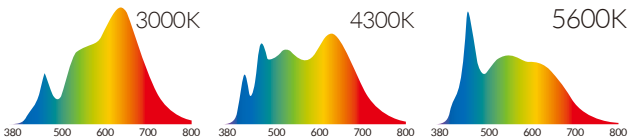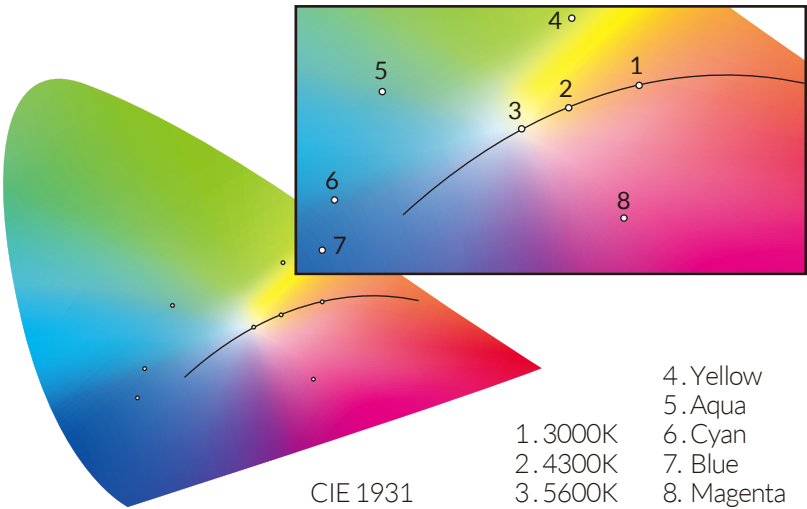

CRI Measurement	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	CRI Ra	CRI Extended	TLCI Results
3000K	98	99	96	96	98	98	99	97	91	98	93	98	98	96	99	98	97	97
4300K	93	96	98	94	94	94	97	94	87	92	91	91	93	98	93	95	94	98
5600K	95	96	99	97	96	94	97	95	86	94	96	92	95	99	96	97	96	99

PHOTOMETRIC DATA

Distance	1 M [3.28 ft]	3 M [9.84 ft]	5 M [16.4 ft]
Beam Diameter	0.87 M [2.85 ft]	2.61 M [8.56 ft]	4.35 M [14.27 ft]
Beam Angle = 47° (>50% of center value)	3000K 744 fc [69 Lux] 4300K 869 fc [81 Lux] 5600K 874 fc [81 Lux] Magenta 268 fc [25 Lux] Yellow 710 fc [66 Lux] Aqua 827 fc [77 Lux] Cyan 896 fc [83 Lux] Blue 510 fc [47 Lux]	3000K 88 fc [8 Lux] 4300K 102 fc [9 Lux] 5600K 102 fc [9 Lux] Magenta 32 fc [3 Lux] Yellow 82 fc [8 Lux] Aqua 95 fc [9 Lux] Cyan 103 fc [10 Lux] Blue 59 fc [6 Lux]	3000K 35 fc [3 Lux] 4300K 40 fc [4 Lux] 5600K 41 fc [4 Lux] Magenta 13 fc [1 Lux] Yellow 33 fc [3 Lux] Aqua 38 fc [4 Lux] Cyan 41 fc [4 Lux] Blue 24 fc [2 Lux]
Field Angle = 88° (>10% of center value)			
Field Diameter	1.91 M [6.27 ft]	4.74 M [15.55 ft]	9.57 M [31.99 ft]

SPECIFICATIONS

Size (without Barndoor)	4" (Diameter) x 7.8" (length)
Weight (Includes Yoke)	2.8lbs / 1.29 kg
LED	Patented Dense Matrix LED Technology
Thermal Design	Advanced Vapor Cooling System
Color Options	3000K / 4300K / 5600K / Magenta / Yellow / Aqua / Cyan / Blue
CRI	>92
Power Consumption	60W Max.
Power Input	12 to 28 V DC
AC Adapter	100-240V AC, 50 / 60Hz (In) / 24V DC , 90W max. (Out)
Operating Temperature	0 - 40° C / 32° - 104°F



OPTIONS

The P200 is available in the K311 Lighting Kit

A variety of light modifiers and accessories are available for the P200.



Fiber Cap



Fiber Glow



Color Blender



Fiber Adapter



P2Q Converter Kit



Dome Diffuser

Visit www.fiilex.com for more info.

